


## Power board COB2103

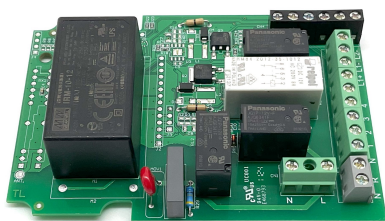

Power board for extractor hoods and management of motors, lights and accessories. Equipped with an all-range power supply of 110V at 60Hz, which allows management of sequential switch or brushless motors via PWM. The light is controlled directly from the board at 12V maximum 10W and optionally comes with a maximum 60W external power supply. It is equipped with a light dimmer and dynamic white. It is additionally equipped with an output for heating resistors or an additional 230VAC consumer. It is possible to add a 433MHz Rx module for radio frequency and duct opening control, free contacts or management of additional duct motorisation. The board complies with the latest Energy Label and Ecodesign standards. Standby consumption is less than 0.5W and it is possible to plug in a Cobofra Wi-Fi module for control via apps, Alexa and Google Home.

Board technology	Relay/mosfet
Motor output	100-240VAC 50-60Hz - Max 600W
Output 3	100-240VAC 50-60Hz - Max 600W
Micro contact 1	Optional
Standby consumption	< 0,5W
BT/Wi-Fi Technology	Optional
Product size	110x78 mm

Input voltage	100-240VAC 50-60Hz
Light output	12VDC 2 channels - Max 10W
Output 4	/
Micro contact 2	Optional
Remote control technology	Optional
Operating temperature	0° +70°
Conformity	CE/Energy Label/Ecodesign

### Field of application:

Professional extractor hoods

Extractor hoods

Via Enrico Fermi 10 – Z.I. – 35020 LEGNARO (PD) – tel 049 790876 Fax 049 790993  
C.F./P.IVA 00388610289  
Numero REA 251745  
[cobofra@cobofra.com](mailto:cobofra@cobofra.com)

**-ELECTRONIC CONTROLS**

**-INVERTER**

**-CABLING**

**-LIGHTING SOLUTIONS**

